

## Vacuum Forming Silicone Sheet Blue Translucent 1800mm x 2mm 50ShA

**Product SKU: 1001271**

High tear strength vacuum or lamination process material with self healing properties


- High tear strength
- High elasticity (750%)
- Improved abrasion resistance
- Ability to withstand puncture damage without catastrophic failure
- Durability and Lifespan
- Developed specifically for use as a vacuum bagging material
- Supplied as standard in Translucent
- Capability to colour match if required

**Colour: Blue Translucent**

**Material: Silicone**

**Operating temperature range: -60°C to 230°C**

REACH and RoHS.

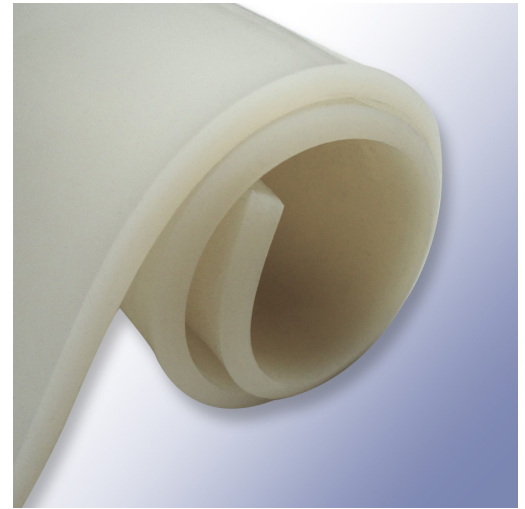

Physical Property	Test Method	Units	Typical Values
Hardness	ASTM D412	ShA	50
Elongation at Break	ASTM D412	%	750
Tensile Strength	ASTM D412	MPa	8.5
Tear Resistance	ASTM D412	kN/m	40
Compression Set		%	
Brittle Point	ASTM D746	°C	-80
Thermal Conductivity	VDE 0304	W.m <sup>-1</sup> .K. <sup>1</sup>	0.24
Limiting Oxygen Index	BS 2782 Part 1	%	24
Radiation Resistance		Grays	>105
Dielectric Strength	VDE 0303	kV.mm-1	23
Dielectric Constant	VDE 0303		2.9
Dissipation Factor	VDE 0303		3x10 <sup>-4</sup>
Volume Resistivity	VDE 0303	ohms.cm	3x10 <sup>15</sup>

Although the technical details and recommendations made correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use Polymax products must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product. All sales subject to our standard terms [www.polymax.co.uk/sales-terms](http://www.polymax.co.uk/sales-terms)