

## Electrically Conductive Silicone Sheet 915mm x 2mm


**Product SKU: 3043947**

*Carbon black filled silicone material that can conduct a low electrical amperage.*

**Colour: Black**

**Material: Silicone**

**Operating temperature range: -54°C to 260°C**

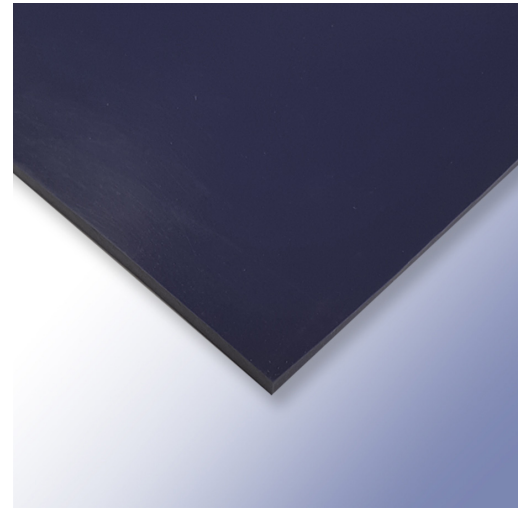

| Physical Property          | Test Method | Units   | Typical Values |
|----------------------------|-------------|---------|----------------|
| Hardness                   | ASTM D412   | ShA     | 65             |
| Elongation at Break        | ASTM D412   | %       | 325            |
| Tensile Strength           | ASTM D412   | MPa     | 5.3            |
| Tear Resistance            | ASTM D412   | kN/m    |                |
| Compression Set 22hrs @100 |             | %       | 15             |
| Volume Resistivity         |             | ohms-cm | 5              |

Although the technical details and recommendations made correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use Polymax products must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product. All sales subject to our standard terms [www.polymax.co.uk/sales-terms](http://www.polymax.co.uk/sales-terms)